


CEILING BAFFLES

# LEVEL

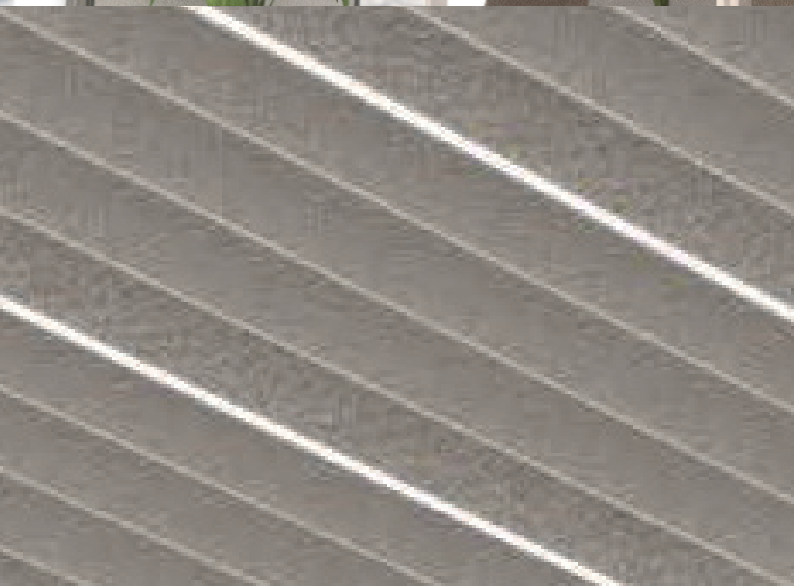

Level is a bold, single-blade ceiling baffle with a clean, straight-cut profile. Each blade can be customised to any depth, creating a classic, streamlined look with strong architectural lines and high acoustic performance. Perfect for workplaces, education settings and public interiors that need both design impact and sound control.

For technical support or further advice, contact:

[hello@ecousta.com](mailto:hello@ecousta.com) | +44 (0)1273 750 240

 **ecousta**  
Sustainable Acoustic Solutions

**DISCLAIMER**


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

# COLOUR RANGE

12mm & 24mm



# SCHEMATIC

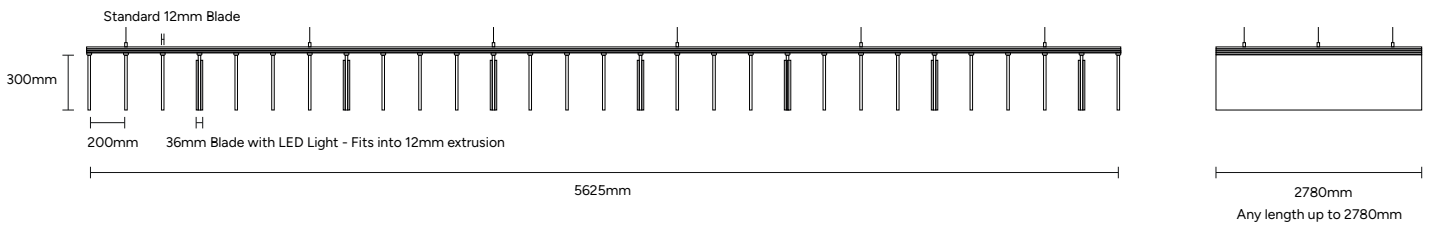

Lighting optional and on request.  
Blade-Length - up to 2780mm. Blade depth-100-300mm

- **Customisable Depth** - Single straight-cut blades can be specified to any depth for tailored aesthetics and acoustic performance.
- **Bold, Classic Aesthetic** - Clean box-profile blades create strong architectural lines and a timeless single-baffle look.
- **High Acoustic Performance** - Made from recycled Ecoutex™ PET for excellent sound absorption in open spaces.
- **Lightweight & Easy to Install** - Precision-engineered blades simplify handling and installation.
- **Sustainable Design** - Ecoutex™ is low-VOC, recyclable and third-party verified to help meet sustainability goals.
- Steel powder coated mat black extrusion.

# SPECIFICATIONS



## COMPOSITION

100% Polythene Terephthalate. 75% Post consumer waste, 25% virgin Bico fibre.



## DIMENSIONS

Manufactured for 12 and 24mm PET. Product dimensions subject to specification.



## COLOURS

160 Colours available. 47 colours from stock. Lead times and MOQs may apply. Light fastness: 6-7 excellent.



## ECOUTEX ACOUSTIC RESULTS

THICKNESS	RESULT TYPE	NO AIR GAP	50MM AIR GAP	100MM AIR GAP	200MM AIR GAP
12mm	aw rating	0.25	0.65	0.9	0.95
	SAA rating - NRC Replacement	0.41	0.76	0.87	0.92
	Absorption Class	E	C	A	A
24mm	aw rating	0.5	0.85	1	1
	SAA rating - NRC Replacement	0.7	0.89	0.94	0.97
	Absorption Class	D	B	A	A



## FIRE & HEAT

**Fire retardant:**  
EN 13501-1: 2018 Classification  
B-s1, d0  
Recommended Service Temp: Up to 80°C

COMPREHENSIVE TECHNICAL DOCUMENTATION ON REQUEST

For technical support or further advice, contact:

[hello@ecousta.com](mailto:hello@ecousta.com) | +44 (0)1273 750 240



### DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

