

CONTOUR 3D

# PARRALELLA

Designed by David Fox



## The Beauty of Simplicity

With Parallela, restraint becomes the defining feature. Clean lines, simple angles, and a refined repetition of elements create a minimal yet striking aesthetic. It's a design that celebrates clarity ideal for interiors that value understated sophistication.

For technical support or further advice, contact:

[hello@ecousta.com](mailto:hello@ecousta.com) | +44 (0)1273 750 240

 **ecousta**  
Sustainable Acoustic Solutions

### DISCLAIMER


This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

# COLOUR RANGE

12mm



# SCHEMATIC

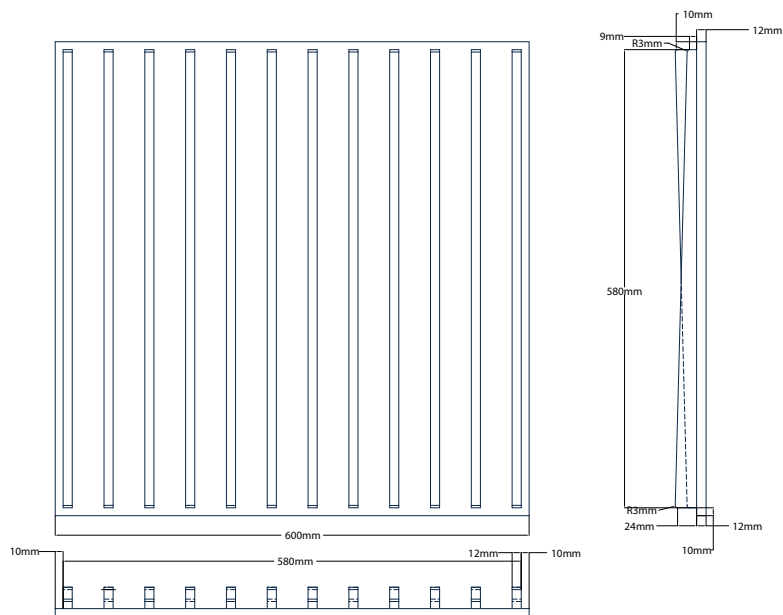

# SPECIFICATIONS



## COMPOSITION

100% Polythene Terephthalate. 75% Post consumer waste, 25% virgin Bico fibre.



## DIMENSIONS

Manufactured for 12mm PET. Product dimensions subject to specification.



## COLOURS

160 Colours available. 47 colours from stock. Lead times and MOQs may apply. Light fastness: 6-7 excellent.



## ECOUTEX ACOUSTIC RESULTS

| THICKNESS | RESULT TYPE                  | NO AIR GAP | 50MM AIR GAP | 100MM AIR GAP | 200MM AIR GAP |
|-----------|------------------------------|------------|--------------|---------------|---------------|
| 12mm      | aw rating                    | 0.25       | 0.65         | 0.9           | 0.95          |
|           | SAA rating - NRC Replacement | 0.41       | 0.76         | 0.87          | 0.92          |
|           | Absorption Class             | E          | C            | A             | A             |
| 24mm      | aw rating                    | 0.5        | 0.85         | 1             | 1             |
|           | SAA rating - NRC Replacement | 0.7        | 0.89         | 0.94          | 0.97          |
|           | Absorption Class             | D          | B            | A             | A             |



## FIRE & HEAT

**Fire retardant:**  
EN 13501-1: 2018 Classification  
B-s1, d0  
Recommended Service Temp: Up to 80°C

COMPREHENSIVE TECHNICAL DOCUMENTATION ON REQUEST

For technical support or further advice, contact:

[hello@ecousta.com](mailto:hello@ecousta.com) | +44 (0)1273 750 240



### DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

