

DESK SCREENS



Introducing Ecoستا's latest collection of acoustic desk screens designed to enhance focus, improve acoustic comfort, and define personal space in today's agile workplaces.

Available in 12mm or 24mm thicknesses (freestanding screens in 18mm & 24mm only), and in a palette of 140 colours, including 52 UK-stocked curated shades, this range offers a seamless blend of sustainability, performance, and design freedom.

All screens are fully customisable, with optional V-grooving, perforations, logo integration, or decorative detailing, achieved via Zünd precision cutting or laser etching, tailored to your brand or interior concept.

For technical support or further advice, contact:

hello@ecousta.com | +44 (0)1273 750 240

 **ecousta**
Sustainable Acoustic Solutions

DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

COLOUR RANGE

12mm & 24mm



SCHEMATIC




Desk-Up & Desk-Up Wrap

Slots easily onto existing desk, no drilling or tools required.

Ideal for: Quick, adaptable installation and clean workspace division.

Sizes: Width 800-1800mm, Height 600-700mm

Thickness: 12mm, 18mm, 24mm

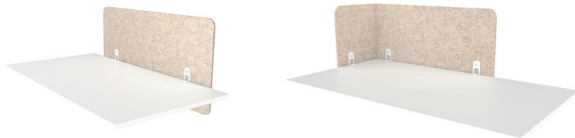


Fly-By & Fly-By Wrap

A floating screen that spans both above and below the desktop. The Wrap version adds extended side returns for enhanced privacy.

Ideal for: Combining modesty with acoustic privacy in open-plan layouts.

Sizes: Width 800-1800mm, Height 600mm

Thickness: 12mm, 18mm, 24mm

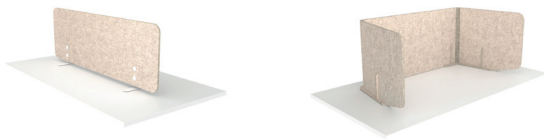

Freestanding

No installation needed, this portable screen can be moved as required.

Ideal for: Flexible layouts, hot-desking, and creating pop-up quiet zones.

Sizes: Width 800-1400mm, Height 380-480mm

Thickness: 12mm



Bench Desking

Designed for banks of conjoined desks, this screen partitions shared spaces for improved comfort, concentration & defining workspace.

Ideal for: Enhancing focus and speech privacy in collaborative environments.

Sizes: Width 1200-1600mm, Height 600-700mm

Thickness: 12mm, 18mm, 24mm

SPECIFICATIONS



COMPOSITION

100% Polythene Terephthalate. 75% Post consumer waste, 25% virgin Bico fibre.



DIMENSIONS

Manufactured for 12 and 24mm PET. Product dimensions subject to specification.



COLOURS

160 Colours available. 47 colours from stock. Lead times and MOQs may apply. Light fastness: 6-7 excellent.



ECOUTEX ACOUSTIC RESULTS

THICKNESS	RESULT TYPE	NO AIR GAP	50MM AIR GAP	100MM AIR GAP	200MM AIR GAP
12mm	aw rating	0.25	0.65	0.9	0.95
	SAA rating - NRC Replacement	0.41	0.76	0.87	0.92
	Absorption Class	E	C	A	A
24mm	aw rating	0.5	0.85	1	1
	SAA rating - NRC Replacement	0.7	0.89	0.94	0.97
	Absorption Class	D	B	A	A



FIRE & HEAT

Fire retardant:

EN 13501-1: 2018 Classification

B-s1, d0

Recommended Service Temp: Up to 80°C

COMPREHENSIVE TECHNICAL DOCUMENTATION ON REQUEST

For technical support or further advice, contact:

hello@ecousta.com | +44 (0)1273 750 240

ecousta
Sustainable Acoustic Solutions

DISCLAIMER

This guide is provided in good faith to assist in installation. It is not intended as a complete or prescriptive method. ECOUSTA accepts no responsibility for results due to variations in site conditions, handling or application. All health and safety standards must be observed.

